

PATAJOINT®

THE BENCHMARK IN ROAD JOINT SEALING

DAMAGED, NEGLECTED OR POORLY EXECUTED JOINTS CREATE ROAD HAZARDS



4 KEY BENEFITS



EASY TO USE

- Immediate learning curve.
- Intuitive controls.



TIME & COST EFFICIENT

- High output. Quick ROI
- Precise dosing. Less waste.




QUALITY RESULTS

- Clean, uniform joints guaranteed.
- Joint blowing and laser guidance.



SAFE & ERGONOMIC

- Integrated flashing light. Enhanced operator safety.
- No buckets. No watering cans. Less strain on operators.

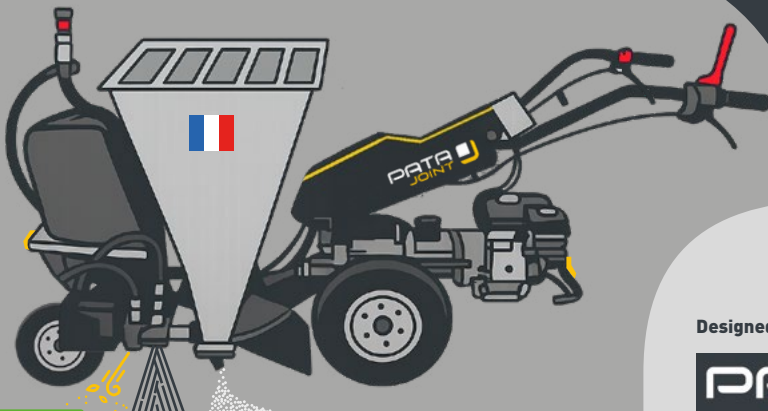

Demonstration
video

Designed and made in France 

PATA
JOINT 



1 PASS



4 STEPS



1.

LASER GUIDANCE

Easy positioning



2.

BLOWING

Dust eliminated



3.

EMULSION

Sealing and durability ensured



4.

SAND

Clean finish and long-lasting performance

TECHNICAL SPECIFICATIONS

- **Interface:** 5" touchscreen
- **Emulsion capacity:** 2 x 20 L
- **Sand capacity:** 3 x 25 kg bags
- **Joint width:** 10 cm
- **Output:** up to 250 m per container
- **Sand dosing:** 6 settings
- **Integrated length measurement system**
- **Advanced modes:** sand **discharge** / emulsion **drain** / pump **heating**



PATAJOINT®

DESIGNED BY USERS
FOR PROFESSIONALS

Contact: **Guy MENARD**

+ 33 (0)6 42 76 23 83

✉ contact@patajoint.fr

www.patajoint.fr



Request a quotation

Included: starter consumables kit

with 2 containers and 5 bags

Weight: approx. 180 kg

Delivery: in a wooden crate

Assembly: supplied assembled and ready for joint sealing

